

ORDER FORM WHIRL

KALDEWEI

Customer:

customer No:

Date:

Order data:

Contact person:

MODEL

Name of model

order No.

Colour code

Colour

easy-clean finish
(with surcharge)

yes

no

other colour

HANDLES (with surcharge)

chrome

WHIRLSYSTEM

Please tick one box (only)

**VIVO
AQUA ECO**

**VIVO
AQUA**

**VIVO
VITA**

**VIVO
VARIO ECO**

**VIVO
VARIO PLUS***

**VIVO
TURBO**

**VIVO
TURBO PLUS**

Specification control elements right*

Specification control elements left*

*Please see attached form for further details. In system VIVO VARIO PLUS touch display position in Duo and corner bathtubs is predefined.

REQUIRED POWER SUPPLY FOR WHIRLPOOL SYSTEMS:

50 Hz

60 Hz

COLOUR OF VISIBLE PARTS OF THE WHIRL SYSTEM:

(Nozzles, outlet and overflow fitting, control panel,
underwater spotlight or light therapy if applicable)

chrome

other colours with surcharge

OUTLET AND OVERFLOW FITTING

Multiplex
Outlet fitting

Multiplex-Trio (with surcharge)
Outlet fitting with built-in inlet

ACCESSORIES

(with surcharge)
Please tick!

**VIVO
AQUA ECO**

**VIVO
AQUA**

**VIVO
VITA**

**VIVO
VARIO ECO**

**VIVO
VARIO PLUS***

**VIVO
TURBO**

**VIVO
TURBO PLUS**

light therapy (LED, multi-coloured incl. white)

illuminated jets (white light)

illuminated jets (blue light)

water heating

disinfection equipment

standard

anti-slip

full anti-slip

Add-on jet pack with 4 additional jets

Add-on jet pack with 8 additional jets

pool handle*

Inspection hatch

Panel/Multiverso

Drilled hole**

with ventilation plate (ventilation cross-section 109 cm²)

long section

cm

Waterfall bath inlet

without ventilation plate

side section

cm

* Please note that the bathtub model offers the possibility of positioning pool handle. Moreover, the mounting height (incl. whirl system) must not exceed 640 mm. Attention! In case of any servicing work to be performed on controls, blowers and pumps after installation, an inspection opening has to be provided. For orders of 6-corner whirlpool baths or in case** special drillings will be required, please provide us with an installation and/or dimensioned sketch indicating diameter of whole and rosette as well as tap body. **Some models may have a projection of the system components.**

REMARKS:

Stamp, date, signature

Customer:

Order data:


Kaldewei whirl baths are available in two different specifications – left and right version, as demonstrated in the drawings below. Please cross check the requested installation situation with one of the following drawings and tick the selected specification on the order form.

Note: Technique arrangement as shown in the sketches can be changed on request in VIVO VITA and VIVO AQUA systems.


See “Technical information Whirl systems” for information about required inspection opening and installation requirements.

The whirlpool bathtubs are suitable for ambient temperatures of +5° to +45°C. In case of outdoor use, ensure that the whirl system, water inlet, waste fitting, and surface enamel are properly protected from dirt and kept suitably covered when not in use.

RIGHT VERSION

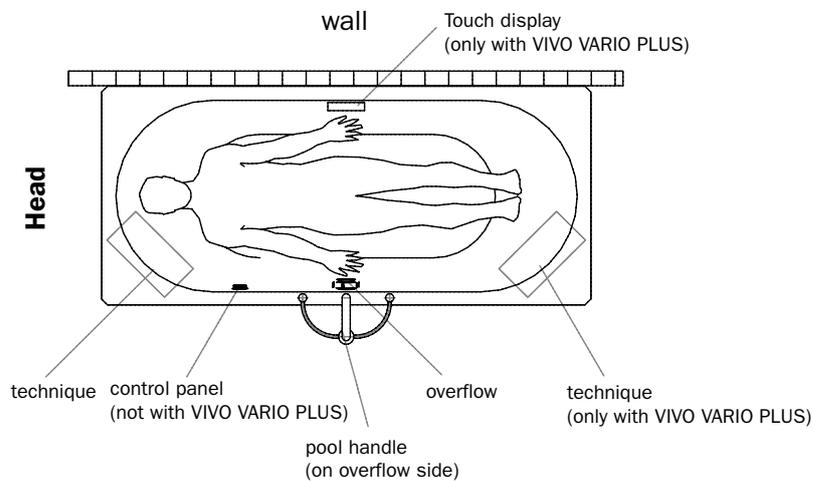

LEFT VERSION

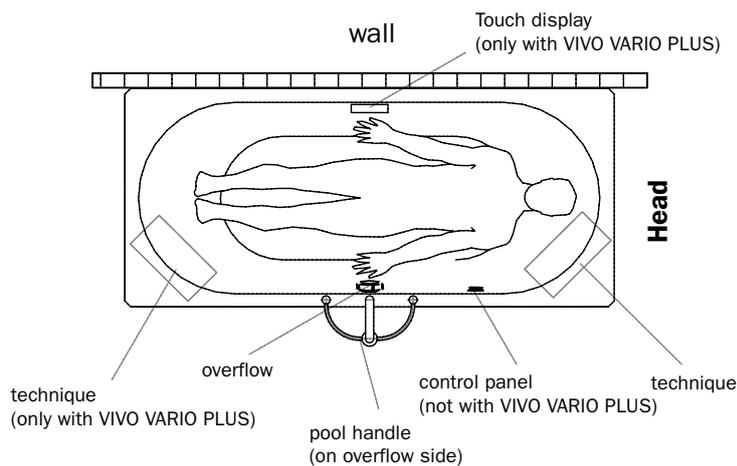

For further enquiries:
Address of plumber:

Address of installation: